


S3AC~S3MC
Rev.B Feb.-2021



\$, - 1 2 3 / Electrical Characteristic Curve

Fig.1 Forward Current Derating Curve




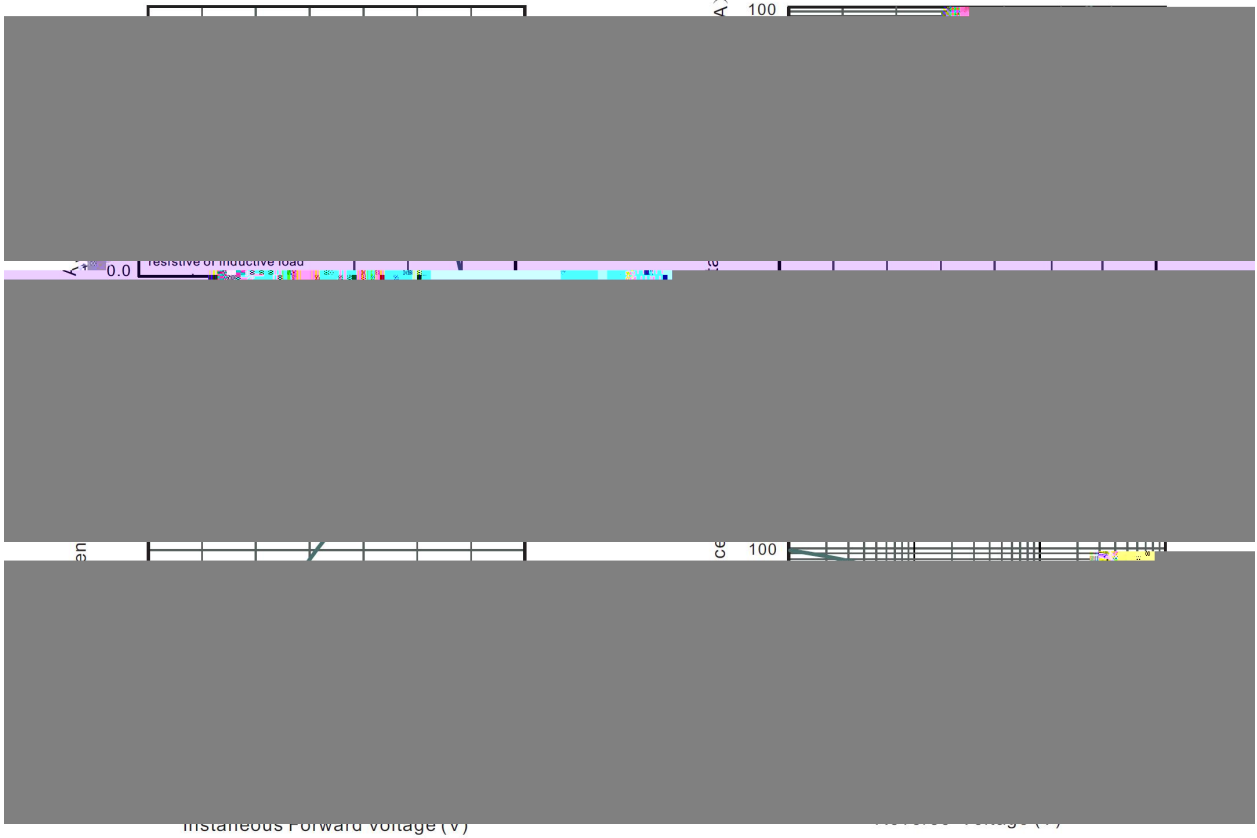


Fig.6 Maximum Non Repetitive Peak

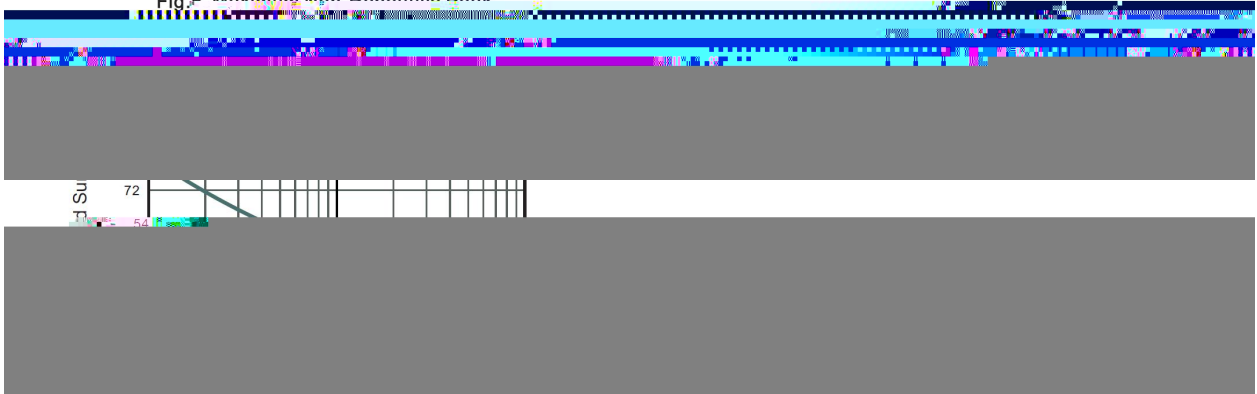







S3AC~S3MC

Rev.B Feb



< = > ? @ 1 2 3 (A B) / CDE FDGH I J K L M N O P Q R S T U V W X Y Z [\] ^ _ ` a b /

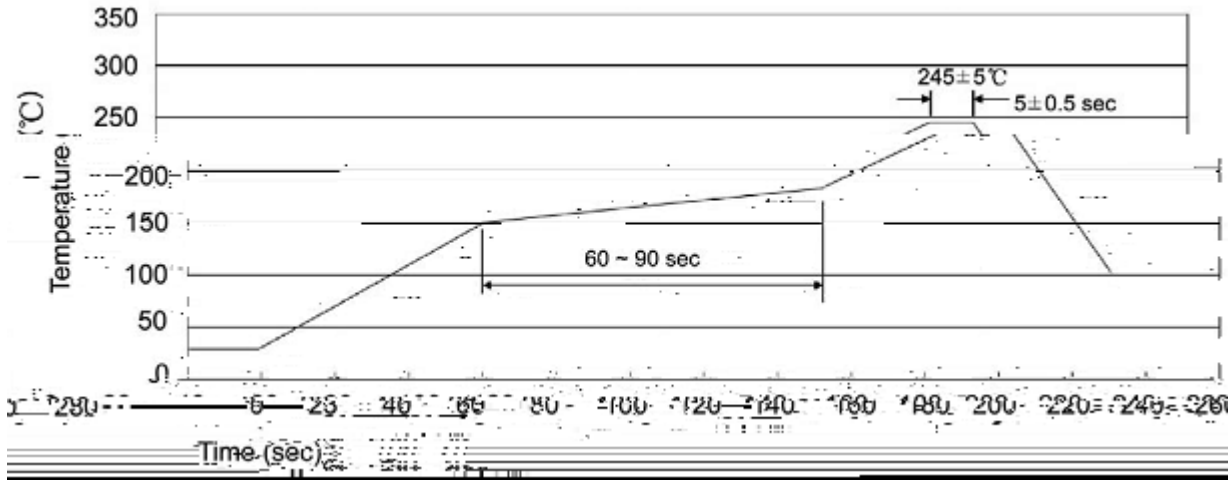

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|--|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150°C, Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | | 2 | 10°C/sec. | | 3. Cooling Speed: 2~10°C/sec. |

\ >] ^ _ ` a b / Resistance to Soldering Heat Test Conditions

260±5°C 10±1 sec. Temp.:260±5°C Time:10±1 sec

c d e f / Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱