


Rev.F Apr.-2018

SOD-123 MM $\approx 9^\circ$ || 1
 Schottky Diode in a SOD-123 Plastic Package.

HF* b я l l 0.3 r b 0.5 H n f β
 Low positive pressure drop, can ignore the reverse recovery time. HF Product.


$\approx 9^\circ$ || 1
 Schottky diode.




PIN1:Cathode PIN2:Anode

Model	SD103AW	SD103BW	SD103CW
Marking	HS4	HS5	HS6

Rev.F Apr.-2018

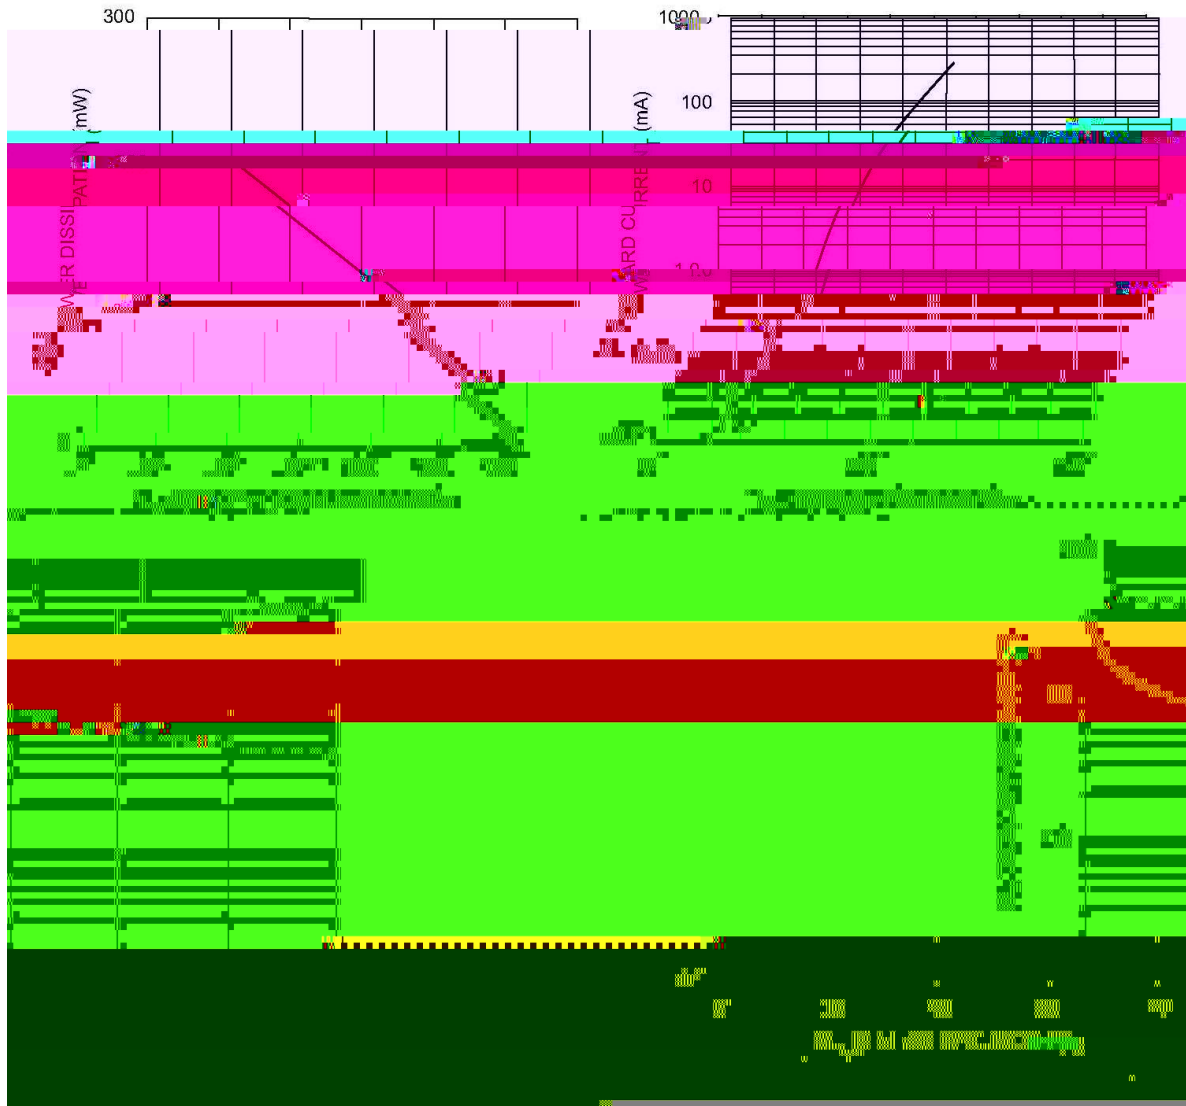

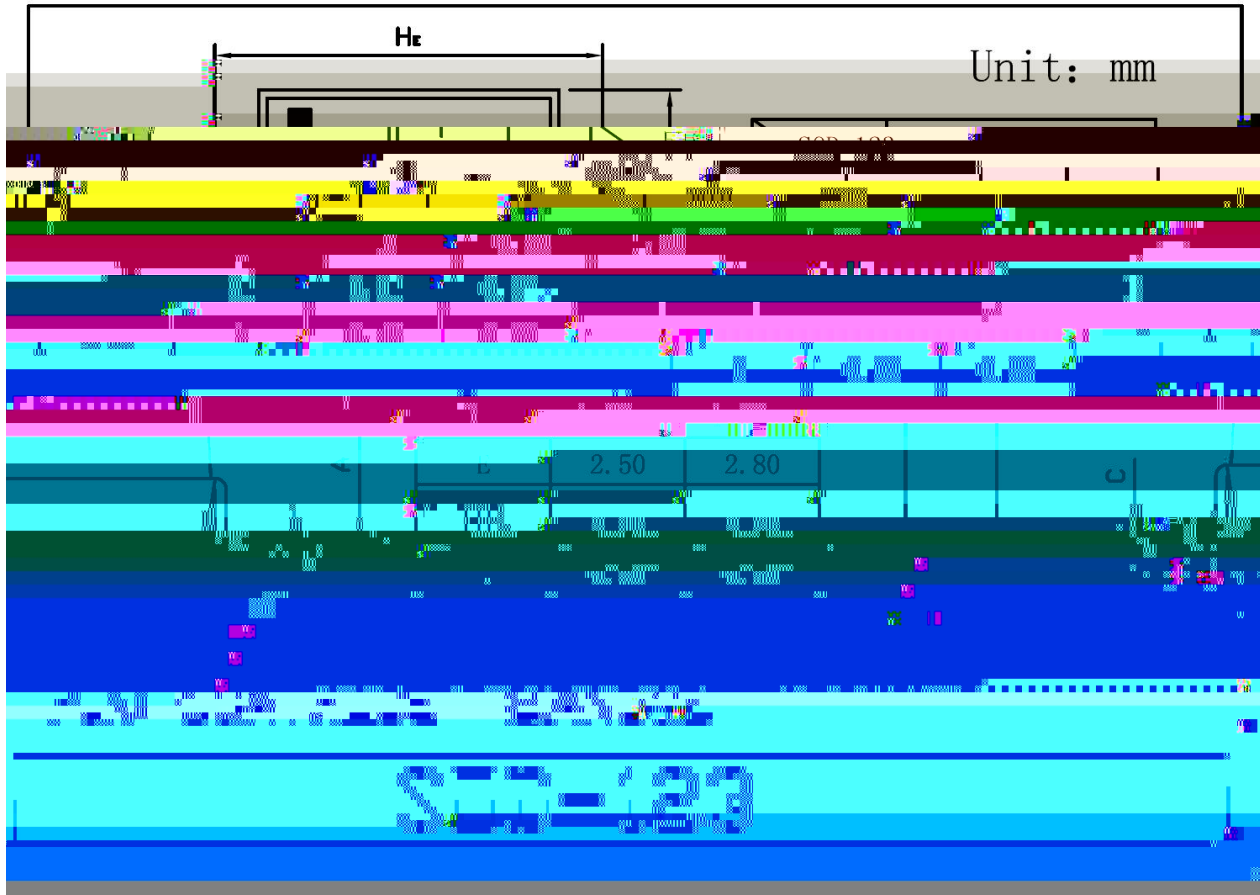



” X


K X ㄟ 3^N ㄱ

V8 X ㄟ 3^N ㄱ

Note:

H: Company Code.

S5: Product Type.

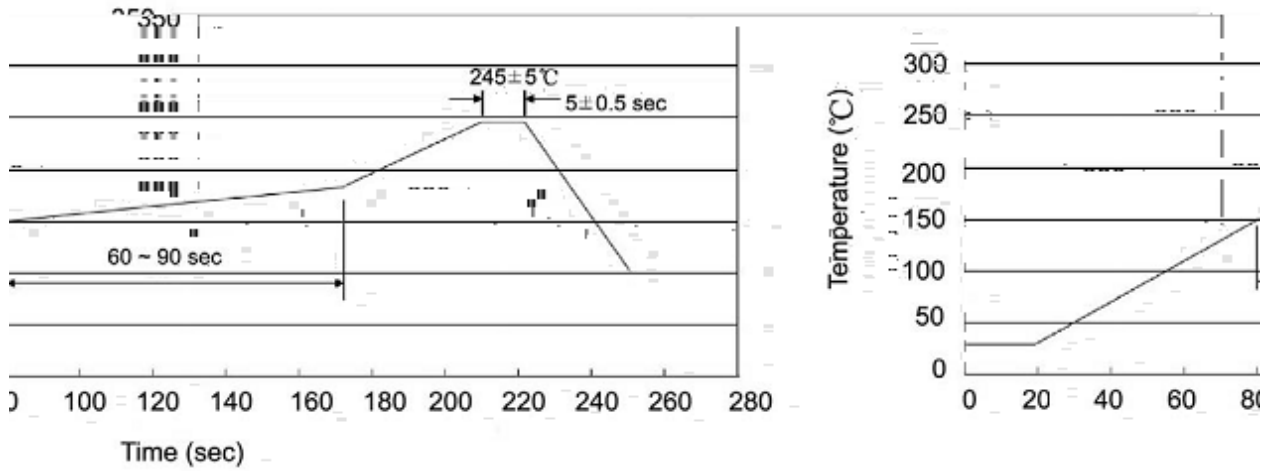

1. 150~180 °C, Time: 60~90sec;
 2. 245±5 °C, Duration: 5±0.5sec;
 3. Cooling Speed: 2~10 °C/sec.

Note:

1. Preheating: 150~180 °C, Time: 60~90sec.
 2. Peak Temp.: 245±5 °C, Duration: 5±0.5sec.
 3. Cooling Speed: 2~10 °C/sec.

260±5 °C, 10±1 sec.

Temp.: 260±5 °C

Time: 10±1 sec

REEL

Package Type	Units					Dimension		(unit mm ³)