



400W $n \mu \text{É} \times 9 \text{Á} \ 9 \ \text{ò} \sim k \quad V_{\text{RMW}}: 5.0\text{V} \sim 440\text{V} \ \text{È} \ V^\circ \ \text{SMAF} / \text{xo}\check{z}$
 400W Surface Mount Transient Voltage Suppressor È Stand-Off Voltage Ö 5.0V~440V È SMAF thin package.

$i \ \text{è} \ \acute{a} \ q \cdot \ 4 \} \ \text{e} \ n \ \mu \ \text{É} \ \times \ k \ i \ \text{ø} \ \acute{d} \acute{y} \ / \ \acute{I} \ k \ \beta \ z \ k. > \% \ \text{Š} \ \text{Æ} \ \wedge \ \acute{\prime} \ < \ \text{o}\check{z} \ \text{—}) \ \acute{I} \ D \ \} \ \text{o}\check{z}$
 For surface mounted applications in order to optimize board space È Glass passivated junction È Low inductance È Plastic package has Underwriters Laboratory Flammability Classifications 94V-0. Halogen free product.

$\% \text{²} \ " \ ($
 General purpose.

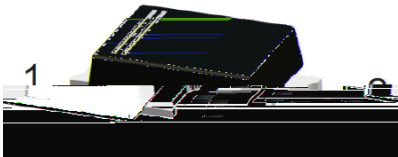

) U û

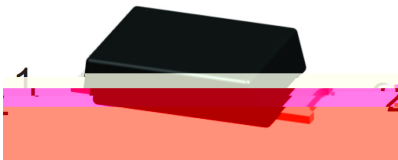

@ f Parameter	... Z Symbol	f › Rating	% y Unit
Peak Pulse Power Dissipation on 10/1000us waveform	P _{PPM}	400	W
Peak Forward Surge Current (Note 2, Fig 4)	I _{FSM}	60	A
Peak Pulse Current on 10/1000 us waveform (Note 1, Fig 2)	I _{PPM}	See Table 1	A
Typical Junction capacitance at VR=4V, f=1MHz	C _J	390	pF
ESD Voltage per IEC6100-4-2 Contact Air	V _{ESD1}	f 8	kV
	V _{ESD2}	f 15	kV

Operating Junction Te

Type	Device Marking Ccode	Reverse Stand-off Voltage V_{RMW}	Breakdown Voltage	Test Current	Reverse Leakage	Max. Clamp Voltage	Peak Pulse Current
------	----------------------	--	-------------------	--------------	-----------------	--------------------	--------------------

SMAFJ5.0(C)A~SMAFJ440(C)A
Rev.A May.-2019




DATA SHEET

04 x ? d / Electrical Characteristics(Ta=25 ;)

Electrical Characteristics(Ta=25 ;)

Type		Device Marking Ccode		Reverse Stand-off Voltage	Breakdown Voltage		Test Current	Reverse Leakage	Max. Clamp Voltage	Peak Pulse Current
					V _{RMW}	V _{BR@IT}				
				Uni		Bi	Uni	Bi	V	Min
SMAFJ200A	SMAFJ200CA	SV	V V	200	224	247	1.0	1.0	324.0	1.2
SMAFJ220A	SMAFJ220CA	SX	VX	220	246	272	1.0	1.0	356	1.1
SMAFJ250A	SMAFJ250CA	SZ	VZ	250	279	309	1.0	1.0	405.0	1.0
SMAFJ300A	SMAFJ300CA	TE	UE	300	335	371	1.0	1.0	486.0	0.8
SMAFJ350A	SMAFJ350CA	TG	UG	350	391	432	1.0	1.0	567.0	0.7
SMAFJ400A	SMAFJ400CA	TK	UK	400	447	494	1.0	1.0	648.0	0.6
SMAFJ440A	SMAFJ440CA	TM	UM	440	492	543	1.0	1.0	713.0	0.6

Electrical Characteristic Curve

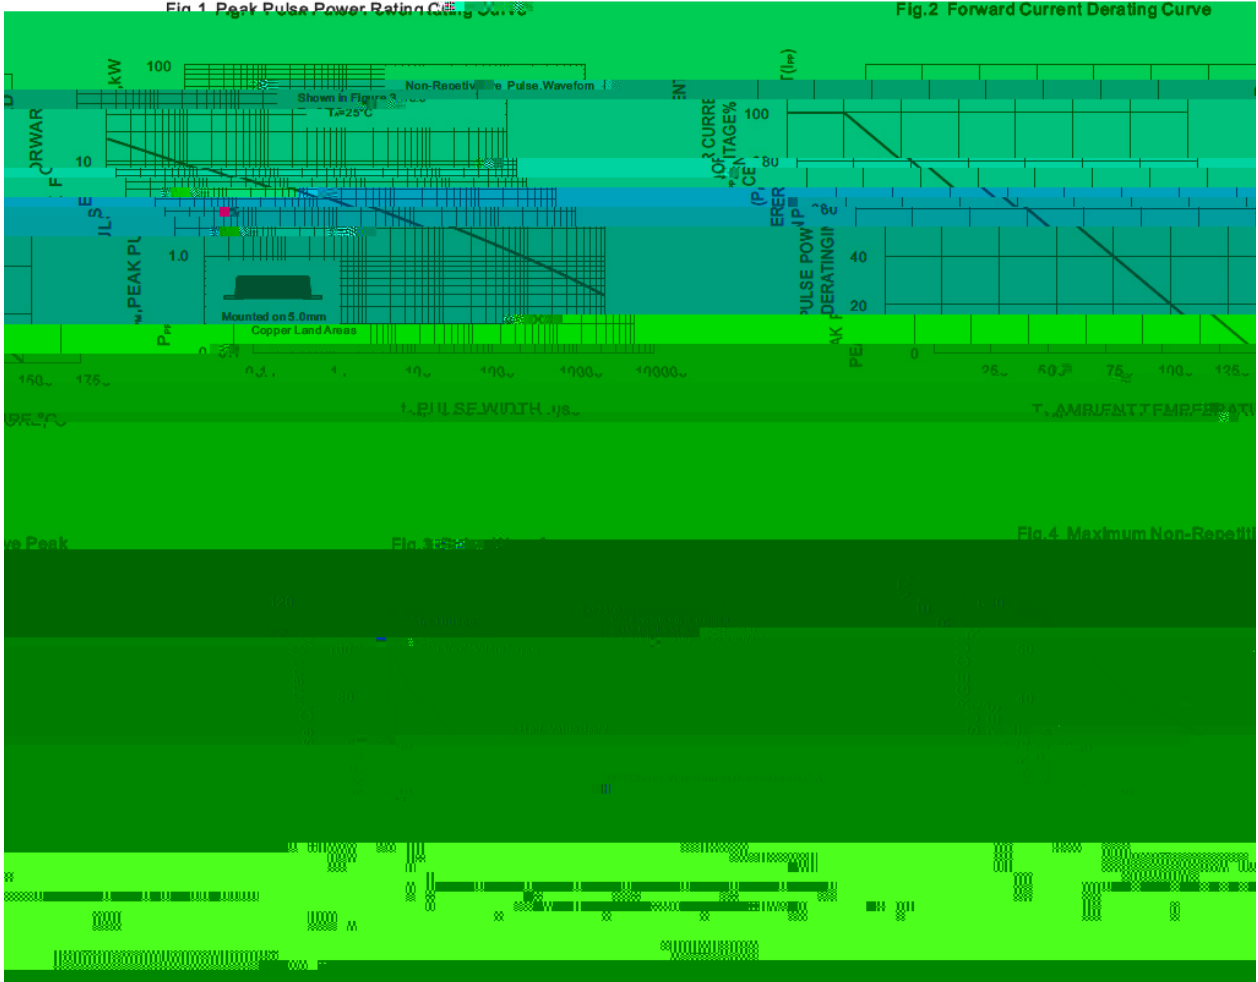


SMAFJ5.0(C)A~SMAFJ440(C)A
Rev.A May.-2019

DATA SHEET

, M y f / Marking Instructions

) U û D0' Ò

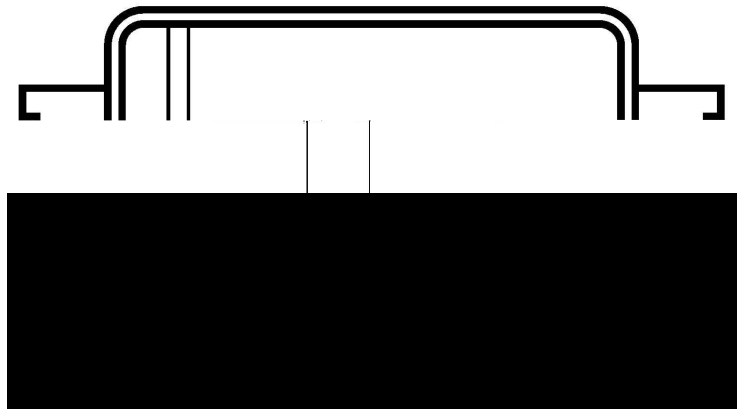


^a ç y

' + y

° Z W A

, M y f / Marking Instructions

U û D0' Ò

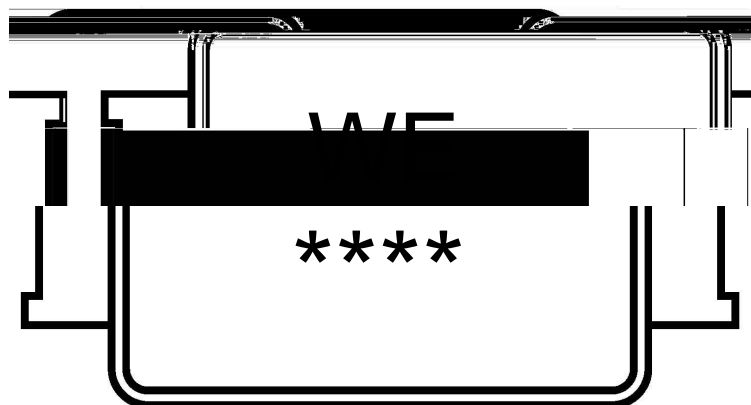

^a ç y

= + y ° Z W A
 **** y ÿ D Z A Ç A k † v ã W A k e µ ç ã 4 Z W A

Note:

= + y Product Type Code
 **** y Lot No. Code k The 1st means:YM Code k The last 3 means:little Lot No Code

SMAFJ5.0(C)A~SMAFJ440(C)A
Rev.A May.-2019

DATA SHEET