

SS52BMA~SS520BMA

Rev.A Nov.-2024



DATA SHEET

20V ~ 200V

5.0A SMB

Surface Mount Schottky Barrier Rectifiers, Reverse Voltage 20 to 200V ,Forward Current:5.0A ,SMB package.

SS52BMA~SS520BMA

Rev.A Nov.-2024




DATA SHEET

Parameter	Symbol	Rating								Unit
		SS52 BMA	SS54 BMA	SS56 BMA	SS58 BMA	SS510 BMA	SS512 BMA	SS515 BMA	SS520 BMA	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	40	60	80	100	120	150	200	V
Maximum RMS voltage	V_{RMS}	14	28	42	56	70	84	105	140	V
Maximum DC Blocking Voltage	V_{DC}	20	40	60	80	100	120	150	200	V
Maximum Average Forward Rectified Current @ Fig.1	$I_{F AV}$	5.0								A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	100								A
Peak Forward Surge Current, 1.0ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	200								A

I²

/ Electrical Characteristic Curve

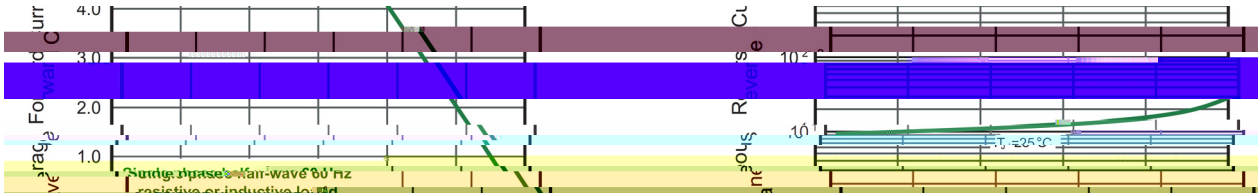

SS52BMA~SS520BMA

Rev.A Nov.-2024

DATA SHEET

Ø □ =) ϕ / Package Dimensions

, M y f / Marking Instructions

^a ϕ y
99 'y ° Z W A
**** y ŷ D Z W A k š ŷ D Z J

Note:

99 'y Product Type Code

**** y Lot No. Code, code change with Lot No

Marking

Type number	Marking code
-------------	--------------

š WD t... • Ž ϕ (x /