

A	2019-7-23	all	SMC-S-SS82C_SS820C-8A 20 OV		
			SS220C	SS820C	
B	2021-2-9	2/8	Cj 600	400	900 600
			VF SS88C=0.70V		0.85V;


SS82C~SS820C

Rev. B Feb.-2021

DATA SHEET


SS82C~SS820C

Rev. B Feb.-2021




DATA SHEET

Parameter	Symbol	Rating								Unit
		SS82C	SS84C	SS86C	SS88C	SS810C	SS812C	SS815C	SS820C	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	40	60	80	100	120	150	200	V
Maximum RMS voltage	V_{RMS}	14	28	42	56	70	84	105	140	V
Maximum DC Blocking Voltage	V_{DC}	20	40	60	80	100	120	150	200	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	8.0								A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Sup		H Ae								





/ Electrical Characteristic Curve






/ Package Dimensions

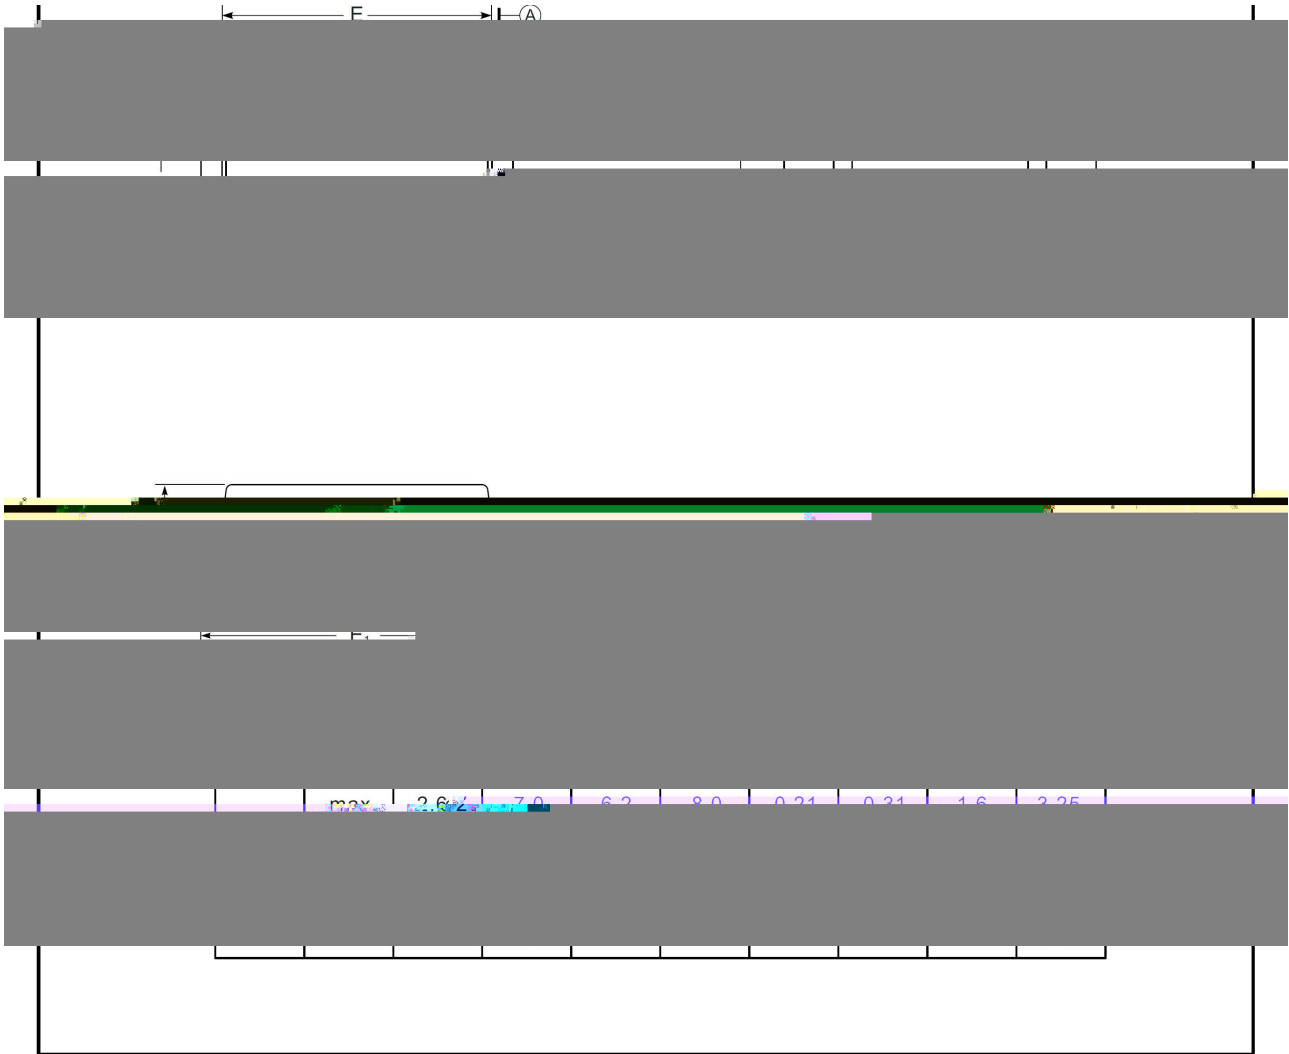





/ Marking Instructions



SS82


1 *

3 *

Note:

SS82 Product Type Code

Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot
No Code



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

