



40~60V

2.0A



PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended soldering pad size is as follows:

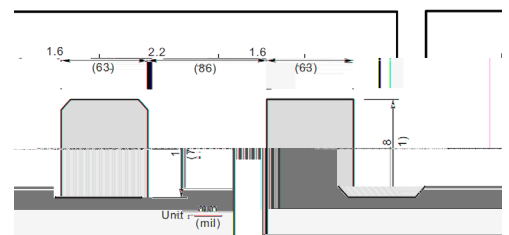


.

Fig.1 Forward Current Derating Curve




Fig.2 Typical Reverse Characteristics

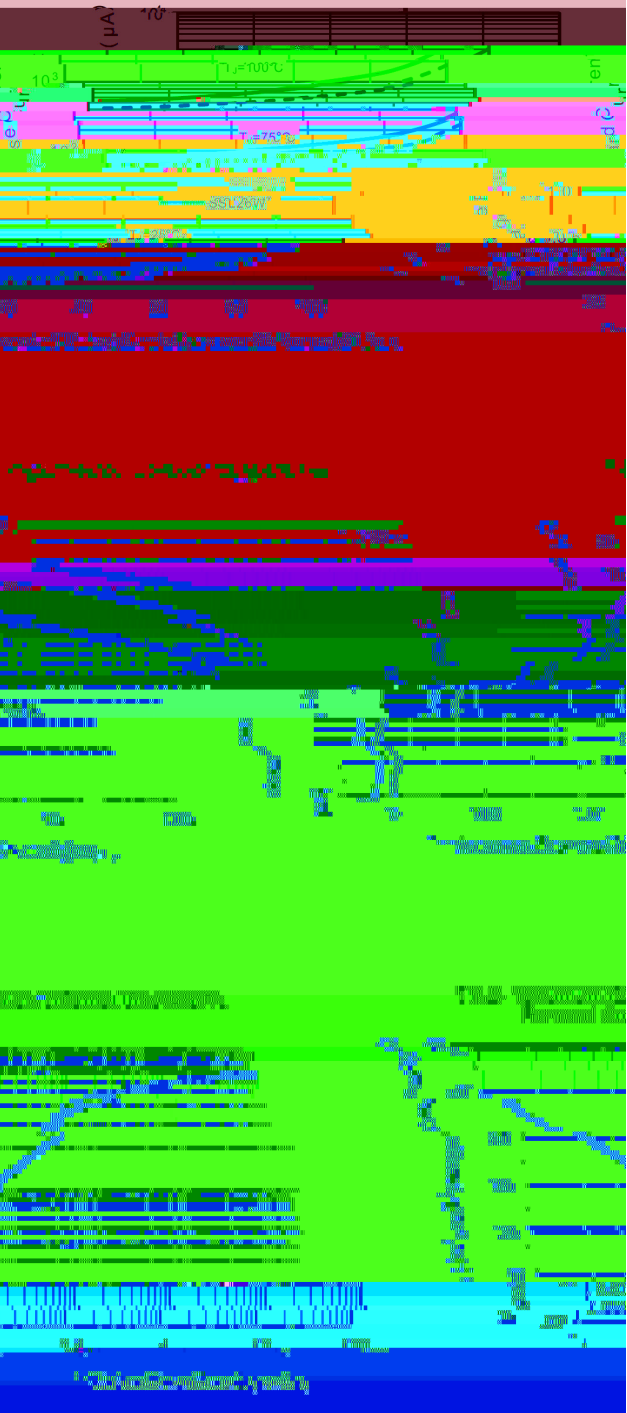



Marking

Type number	Marking code
SSL24F	SSL24
SSL25F	SSL25
SSL26F	SSL26

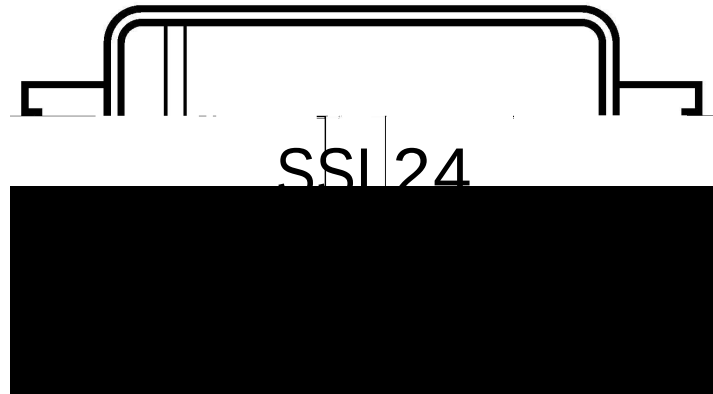

SSL24

1 *


3 *

SSL24

*

*

Temperature Profile for IR Reflow Soldering(Pb-Free)

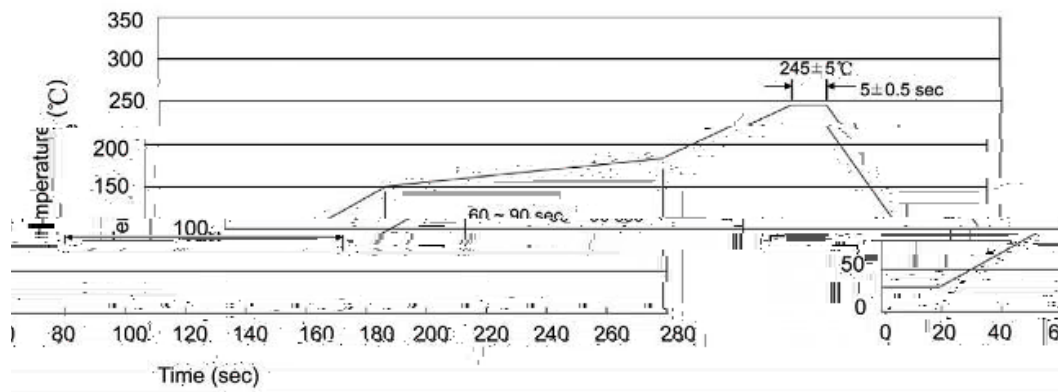

±

±

±

±

±

±

±

±

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box