

/ Descriptions

40V 5.0A SMB



/ Features

/ Applications

/ Equivalent Circuit




/ Pinning

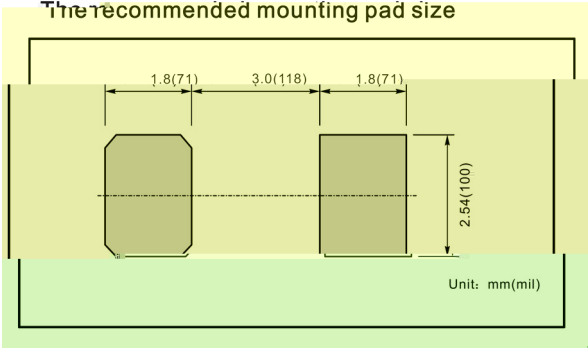



/ Marking

/ Electrical Characteristic Curve

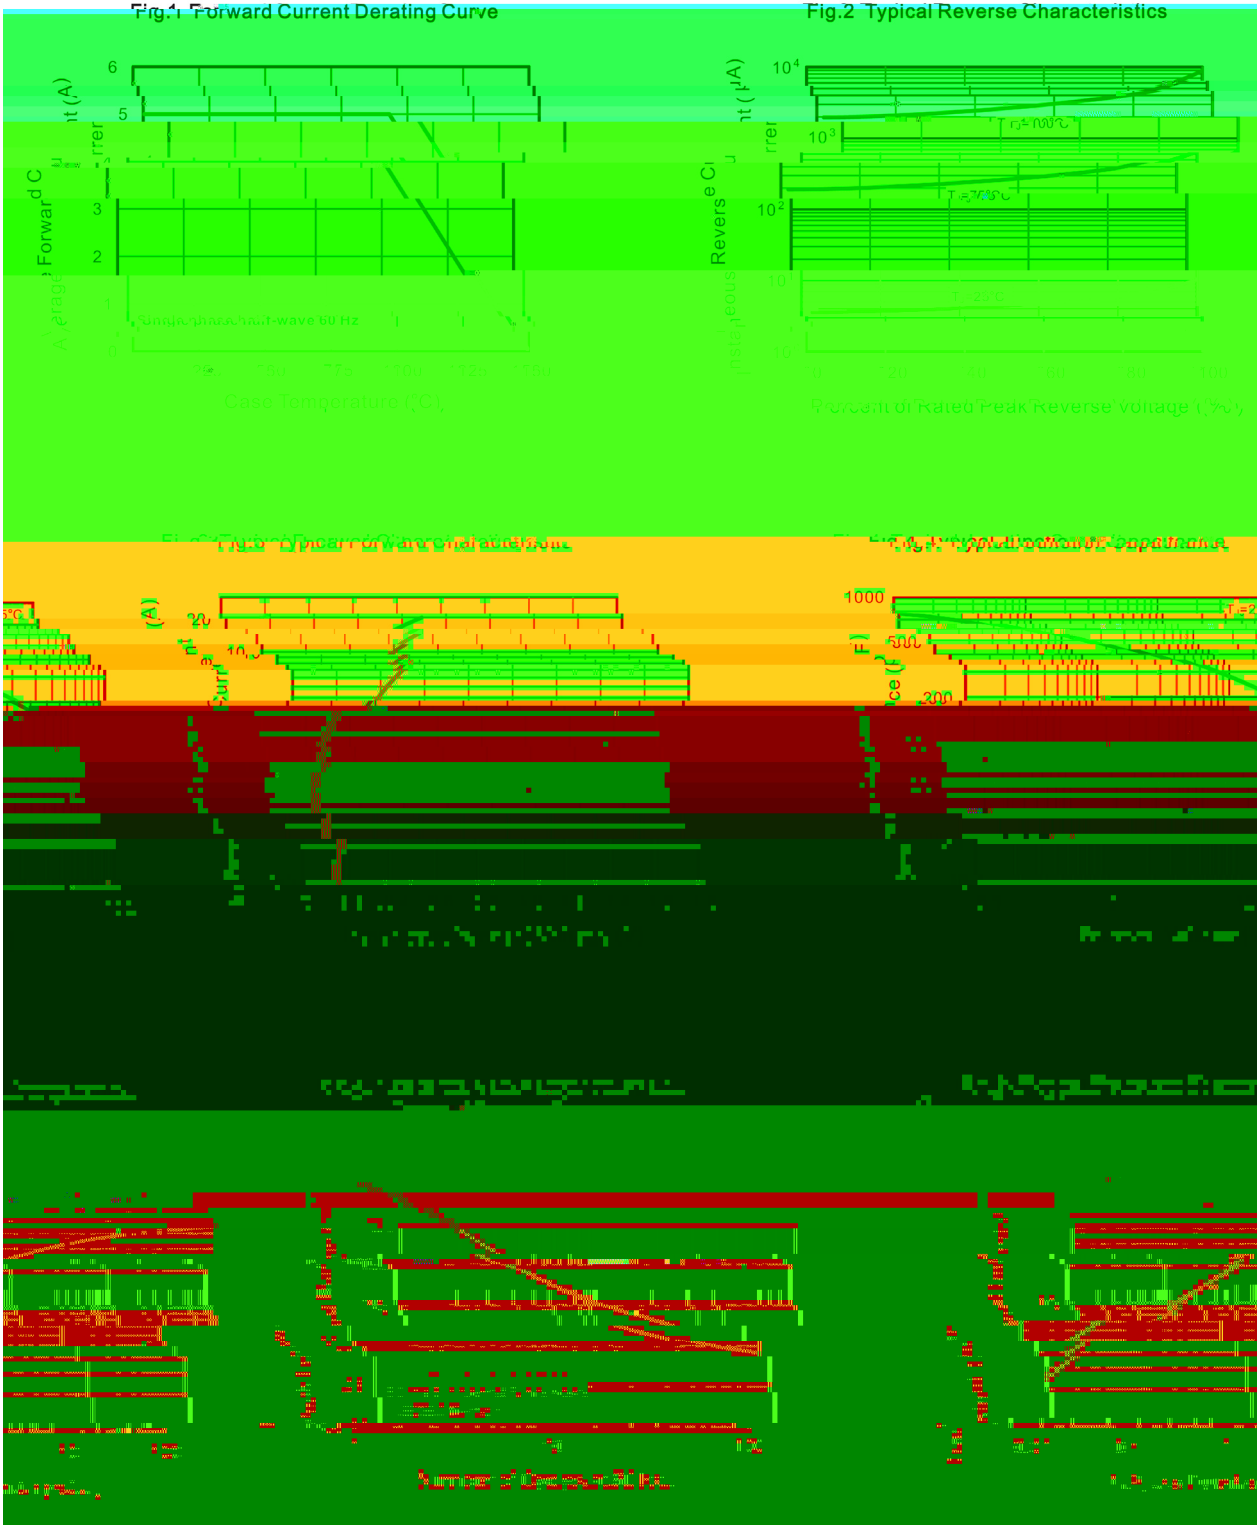

/ Package Dimensions

SMB

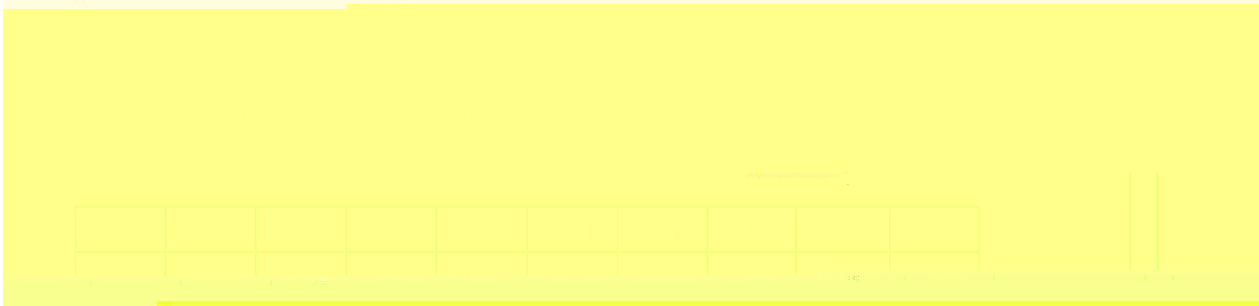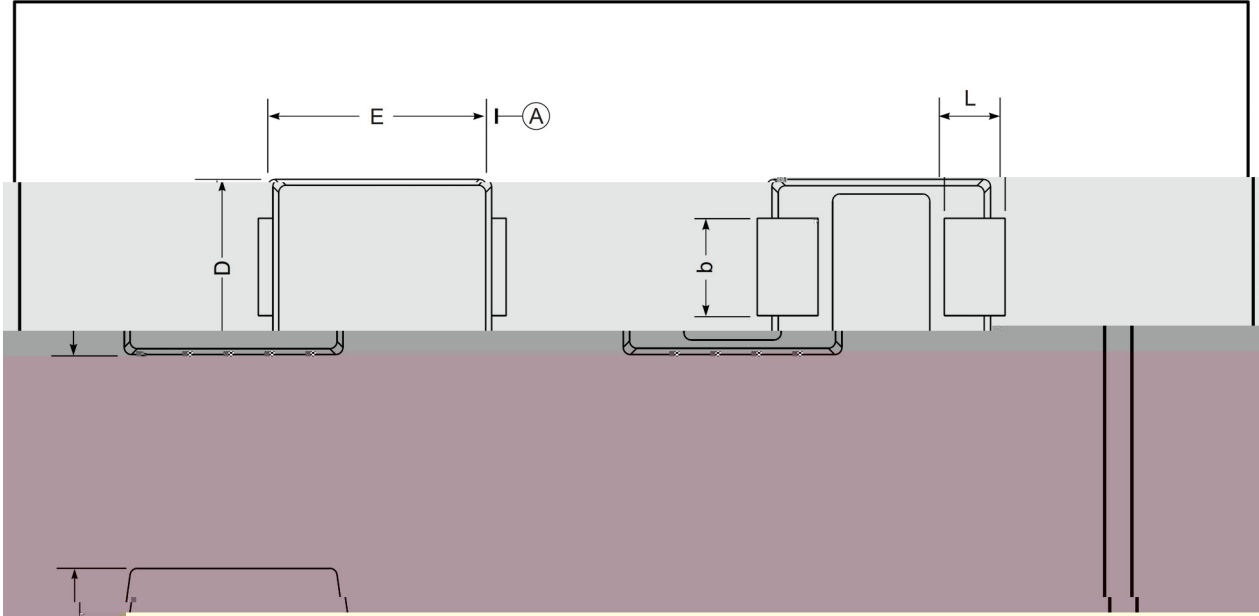

	mm	2.13	4.06	3.30	5.08	0.25	1.27	0.76	0.25	0.25
mil	max	96	185	155	220	7.9	59	12	87	
	min	84	160	130	200	2.0	32	6	75	

() / Temperature Profile for IR Reflow Soldering(Pb-Free)



± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.