

	2018-5				

B 2021-2-18 7

SSL54C~SSL510C

Rev.B Feb.-2021



DATA SHEET

40~100V

5.0



SMC

Surface Mount Schottky Barrier Rectifier, Reverse Voltage: 40 to 60 V, Forward Current:5.0A ,SMC

SSL54C~SSL510C

Rev.B Feb.-2021

\$, - 1 2 3 / Electrical Characteristic Curve

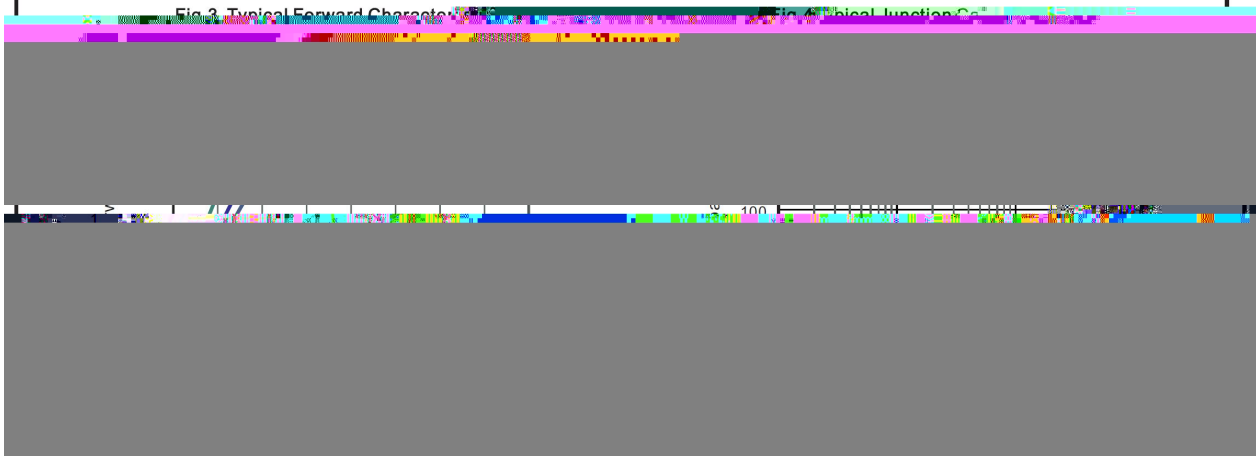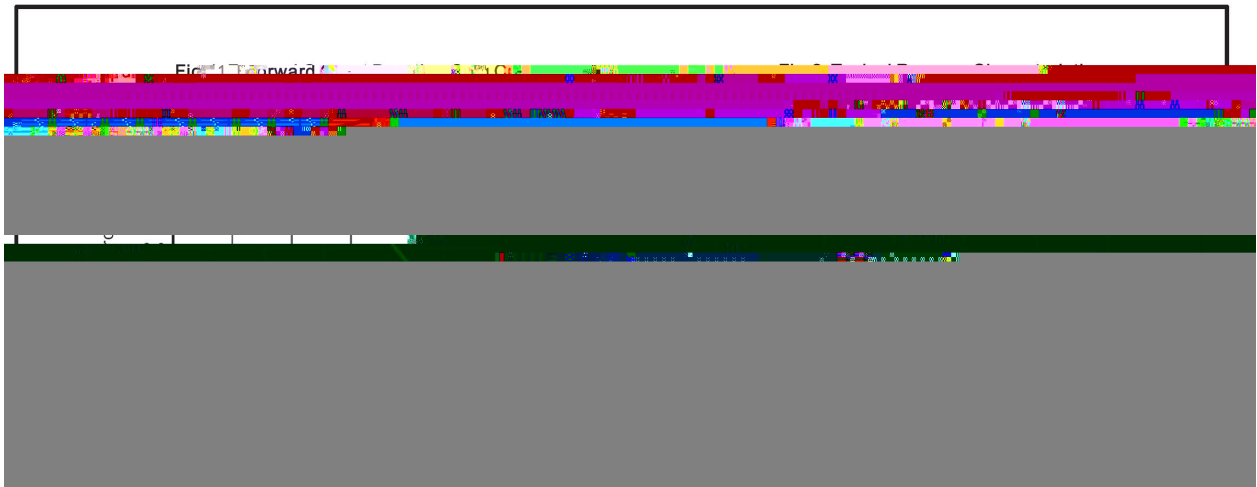

SSL54C~SSL510C

Rev.B Feb.-2021

DATA SHEET


SSL54C~SSL510C

Rev.B Feb.-2021



DATA SHEET

< = > ? @ 1 2 3 (A B) / CDE FDGH I J K L M N O P Q R S T U V W X Y Z [\]

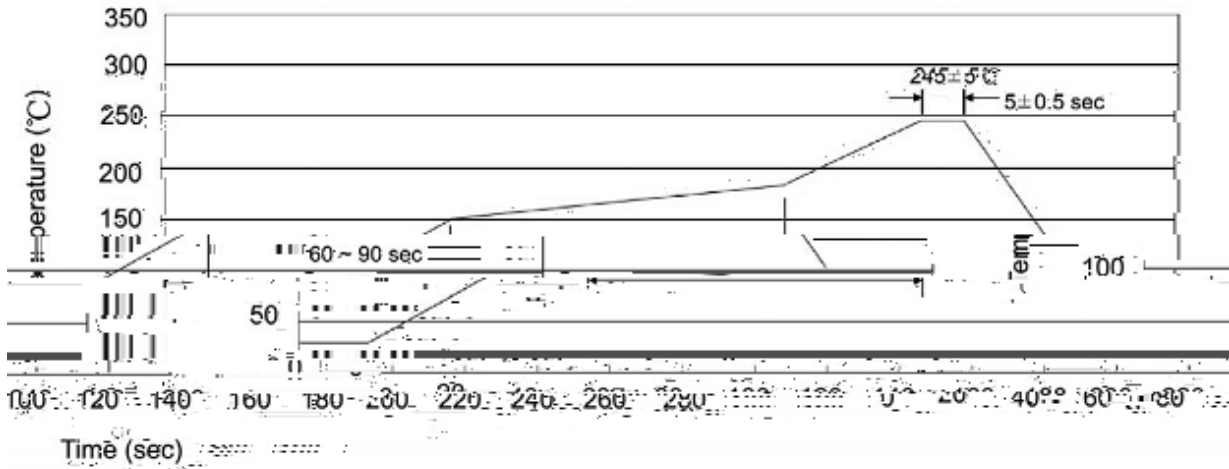

Note:

- | | | | |
|---|---------|-----------|--|
| 1 | 150 180 | 60 90sec; | 1.Preheating:150~180°C, Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | 2 | 10°C/sec. | 3. Cooling Speed: 2~10°C/sec. |

\ >] ^ _ ` a b / Resistance to Soldering Heat Test Conditions

260±5°C 10±1 sec. Temp.:260±5°C Time:10±1 sec

c d e f / Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱