

TIP32

Rev. H Oct.-2018

/ Descriptions

WR0553 ММ SQS æ Ć ħ s ll 1 Silicon PNP transistor in a TO-220 Plastic Package.


/ Features

лъ WLS64 Ы
Complement to TIP31.


/ Applications

Ѽ Ć ħ A l ' ħ ó Ć ħ ŵ z
Medium power linear switching applications.

/ Equivalent Circuit



/ Pinning



PIN1 χ Base PIN 2 χ Collector PIN 3 χ Emitter

/ h_{FE} Classifications & Marking

М ħ " See Marking Instructions.

TIP32

Rev. H Oct.-2018



蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

Parameter	Symbol	Rating				Unit
		TIP32	TIP32A	TIP32B	TIP32C	
Collector to Base Voltage	V_{CBO}	-40	-60	-80	-100	V
Collector to Emitter Voltage	V_{CEO}	-40	-60	-80	-100	V
Emitter to Base Voltage	V_{EBO}	-5.0				V
Collector Current-Continuous	I_C	-3.0				A
Peak Collector Current	I_{CP}	-5.0				A
Base Current - Continuous	I_B	-3.0				A
Collector Power Dissipation	P_C	2.0				W
Collector Power Dissipation	$P_C (T_c=25^\circ C)$	40				W
Junction Temperature	T_j	150				
Storage Temperature Range	T_{sag}	-55 ~ 150				





Parameter

Symbol


Test Conditions

Min Typ Max Unit

/ Electrical Characteristic Curve

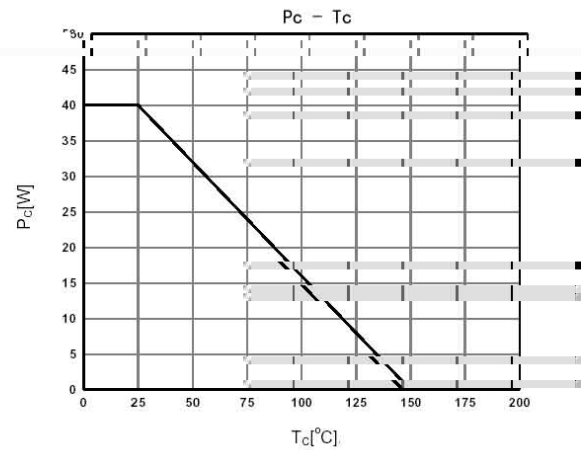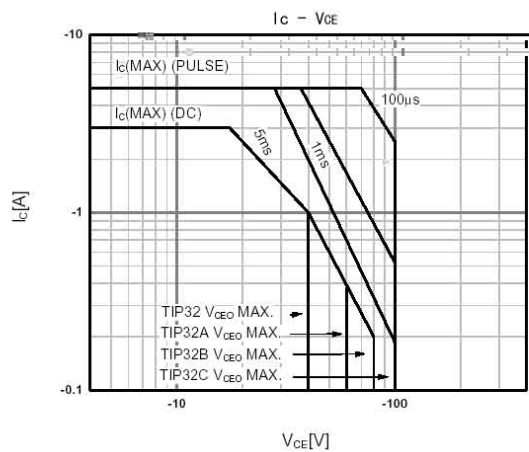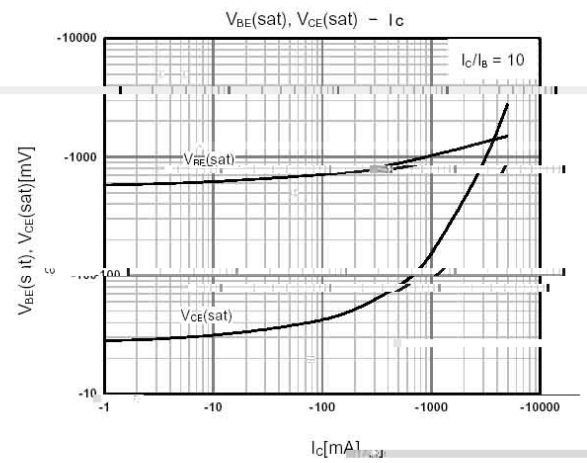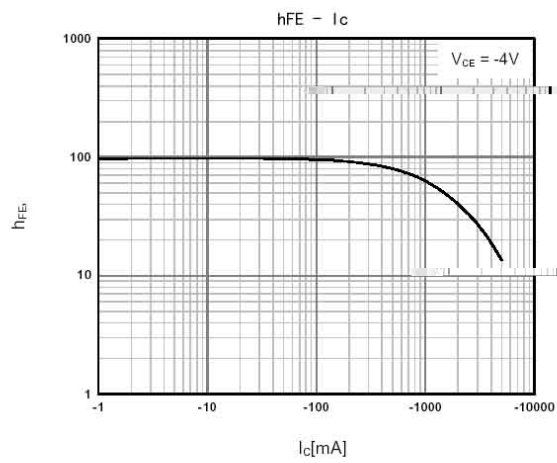

/ Marking Instructions

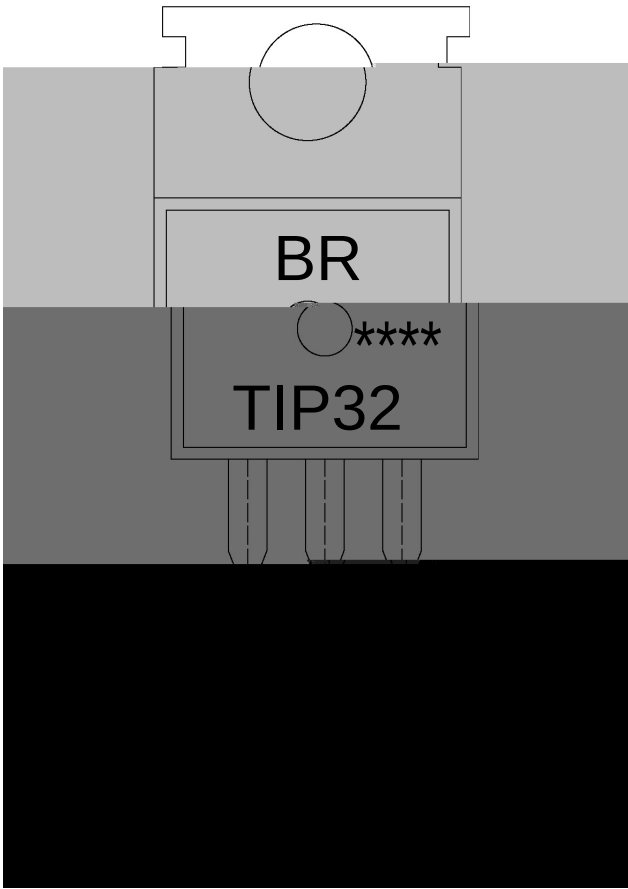

” X	
EU X	ꯏ ꯑ ꯍ ꯓ
WLS65 X	ꯏ ꯑ ꯍ ꯑ ꯎ
---- X	ꯏ ꯑ ꯍ ꯑ ꯎ ꯓ ꯑ ꯒ ꯓ ꯔ ꯕ
Note:	
BR:	Company Code
TIP32:	Product Type.
****:	Lot No. Code, code change with Lot No.

