


50V ~ 1000V

4.0A



| | | | |
|--|--|--|--|
| | | | |
|--|--|--|--|

Fig. 1 Typical Forward Output Rectified Current

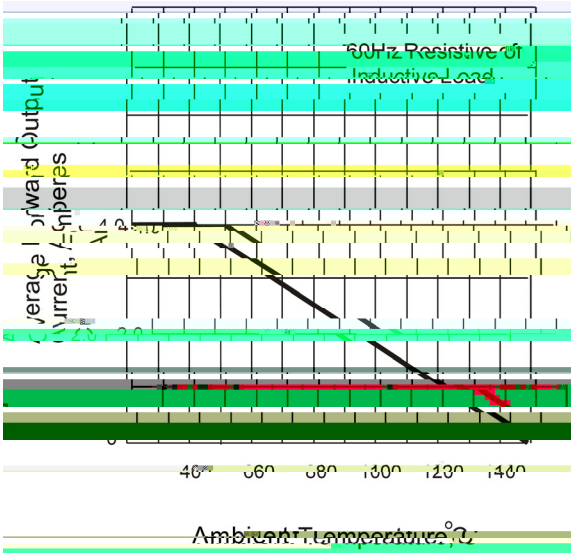


Fig. 2 Maximum Non-Repetitive Peak Forward Surge Current

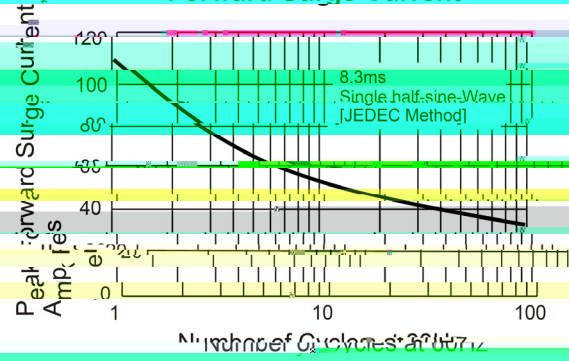


Fig. 3 Typical Instantaneous Forward Characteristics

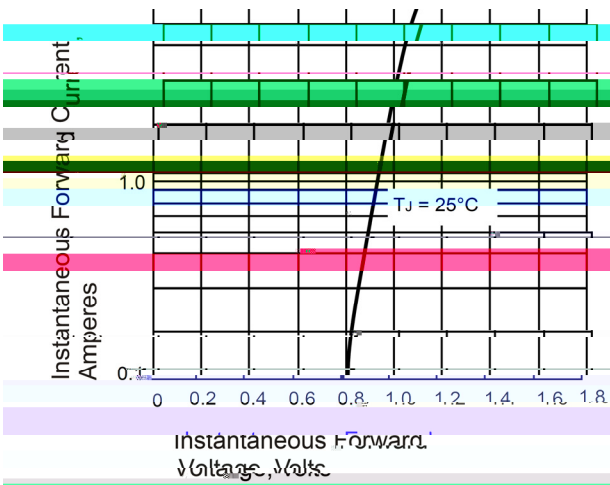


Fig. 4 Typical Reverse Characteristics



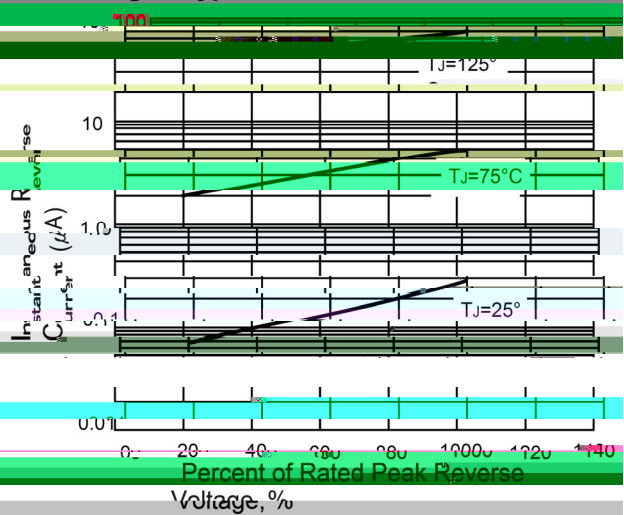


Fig. 5 Typical Junction Capacitance

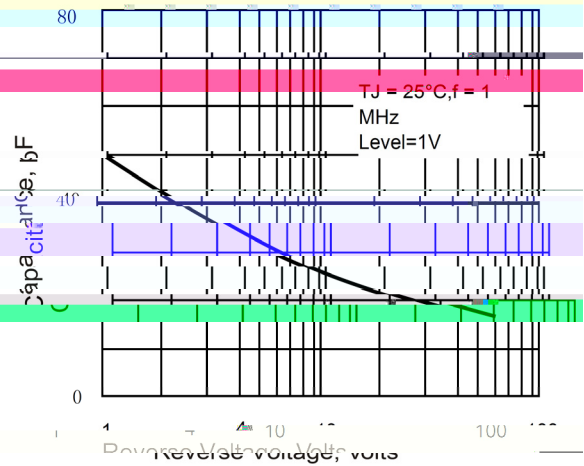

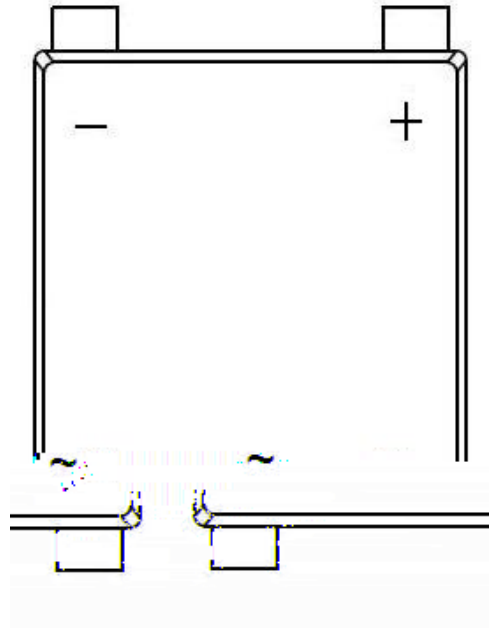

TMBF4005

TMBF4005

Lot No. Code, code change with Lot No

Temperature Profile for IR Reflow Soldering(Pb-Free)

| |
|--|
| |
| |
| |
| |
| |
| |
| |

±

±

±

±