


PDFN 3×3-8L

Complementary Enhancement MOSFET in a PDFN3×3-8L Plastic Package.

N-channel	P-channel
VDS(V)=20V	VDS(V)=-20V
ID=28A	ID=-25A
RDS(ON)<15m (VGS=10V)	RDS(ON)<20m (VGS=-10V)
RDS(ON)<20m (VGS=4.5V)	RDS(ON)<25m (VGS=-4.5V)
RDS(ON)<25m (VGS=2.5V)	RDS(ON)<30m (VGS=-2.5V)

HF Product.


Battery protection switch, Mobile device battery charging and discharging, Load switch

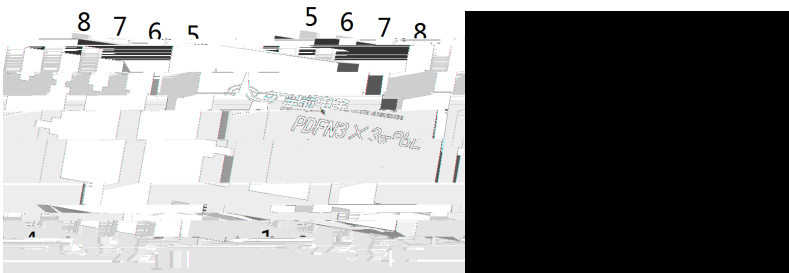

See Marking Instructions.

Parameter	Symbol	Rating		Unit
		N-channe	P-channell	
Drain-Source Voltage	V_{DSS}	±20		V
Gate-Source Voltage	V_{GSS}	±12		V
Continuous Drain Current	$I_D (T_C=25^\circ C)$	28	-25	A
Pulsed Drain Current	I_{DM}	43	-38	A
Avalanche Current	I_{AS}	2.8	13.4	A
Avalanche energy L=0.5mH	E_{AS}	3.9	89.8	mJ
Power Dissipation	$P_D (T_C=25^\circ C)$	18	17	W
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150		
Maximum Junction-to-Ambient	R_{JA}	95		/W
Maximum Junction-to-Case	R_{JC}	7		/W

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V$ $I_D=250\mu A$	20	22.5		V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=20V$ $V_{GS}=0V$			1.0	μA
Gate-Body leakage current	I_{GSS}	$V_{GS}=\pm 12V$ $V_{DS}=0V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\mu A$	0.5	0.7	1.2	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$ $I_D=10A$		10	15	m
		$V_{GS}=4.5V$ $I_D=5A$		11.5	20	m
		$V_{GS}=2.5V$ $I_D=2.5A$		15	25	m
Diode Forward Voltage	V_{SD}	$V_{GS}=0V$ $I_S=1.0A$		0.69	1.2	V
Input Capacitance	C_{iss}	$V_{DS}=15V$ $V_{GS}=0V$ $f=1.0MHz$		1000		pF
Output Capacitance	C_{oss}			715		pF

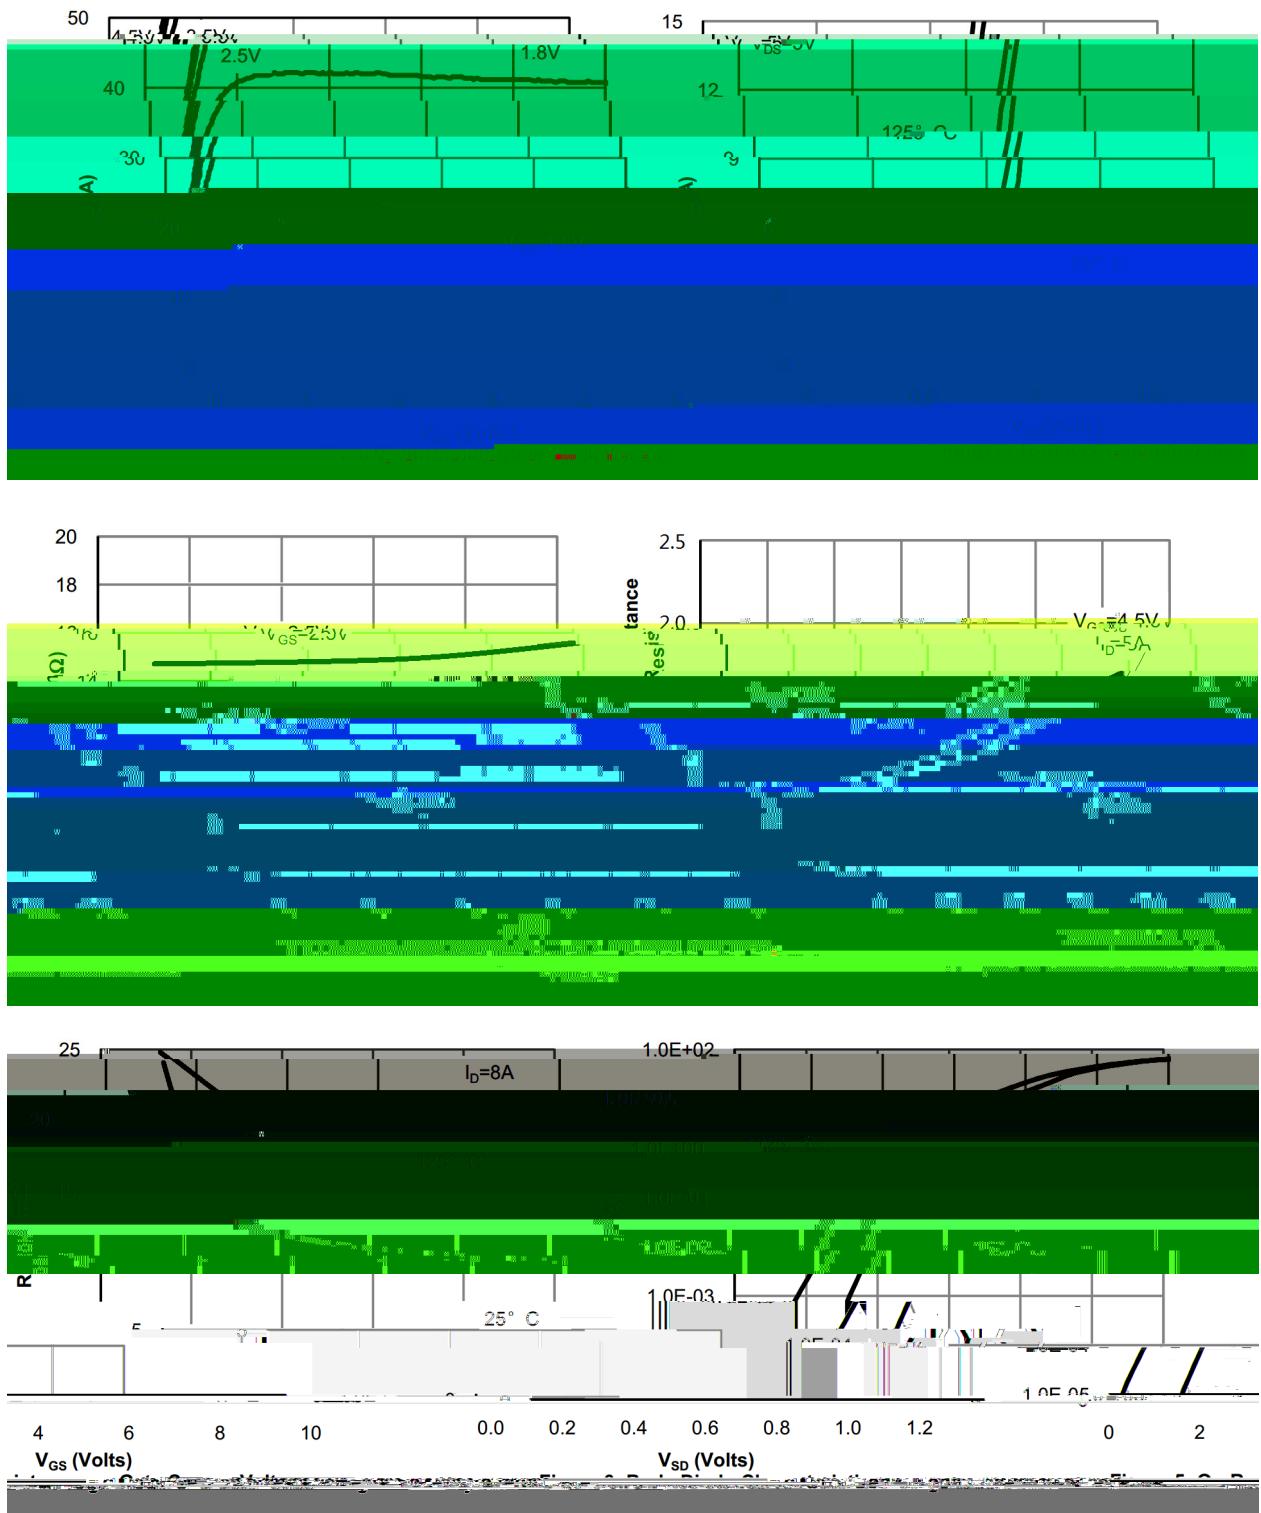




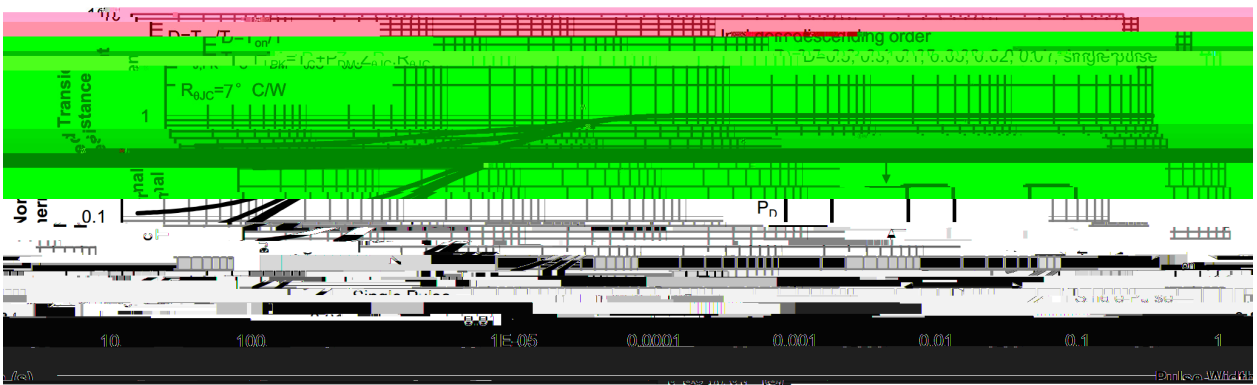


Figure 10: Normalized Maximum Transient Thermal Impedance

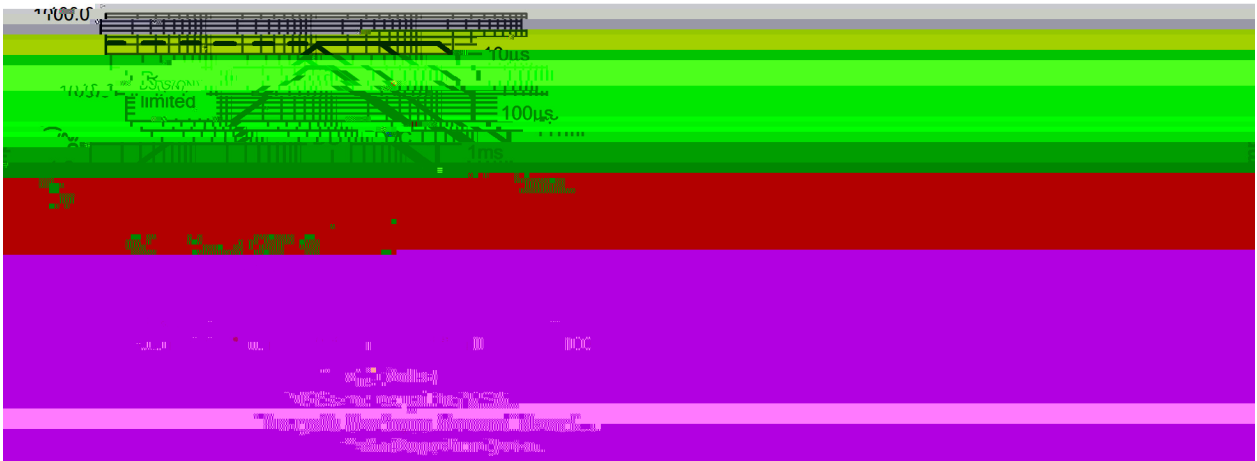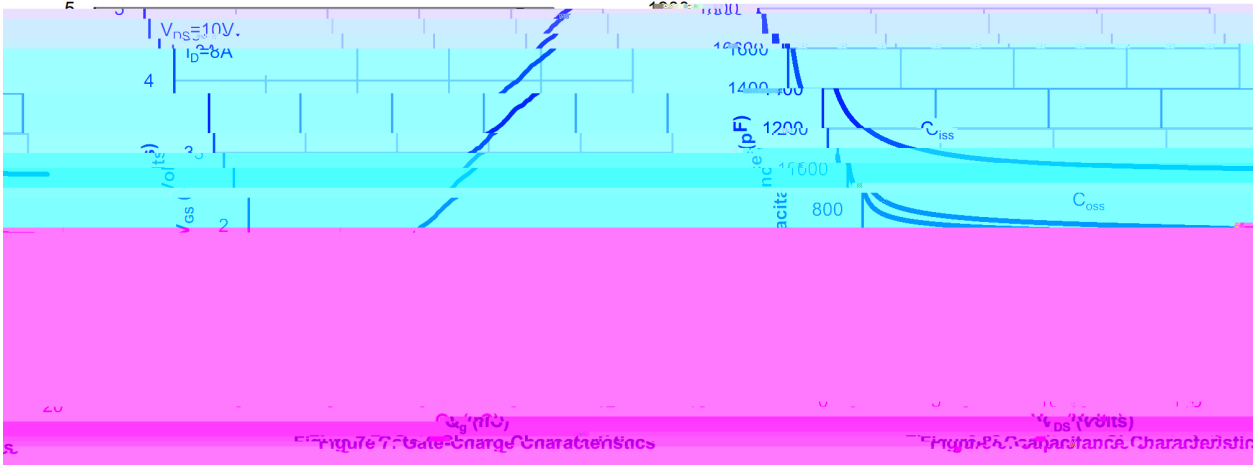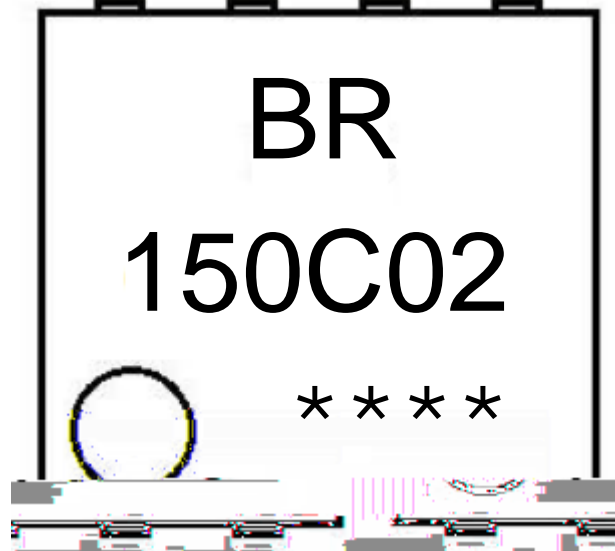

BR

150C02

Note:

BR: Company Code

150C02: Product Type Code

****: Lot No. Code, code change with Lot No

Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

- | | | | |
|---|-----------|-------------|---|
| 1 | 150 ~ 180 | 60 ~ 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | 2 ~ 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

260±5	10±1 sec.	Temp.:260±5	Time:10±1 sec
-------	-----------	-------------	---------------

/ REEL

Package Type

Units

Dimension

(unit mm /9ad51mm4.002480 T